

ROPS FASTENER VERIFICATION INSTRUCTIONS

INSPECTION LOCATIONS OVERVIEW

VIDEO INSTRUCTIONS

2022-2024 RZR Pro R / Pro R 4

<https://www.youtube.com/watch?v=sP2hWcEnXXE>




2025 RZR Pro R / Pro R 4

<https://www.youtube.com/watch?v=wRbuJcryto4>




RZR PRO R

- Ⓐ: A-pillars
- Ⓒ: C-pillars
- Ⓓ: D-pillars

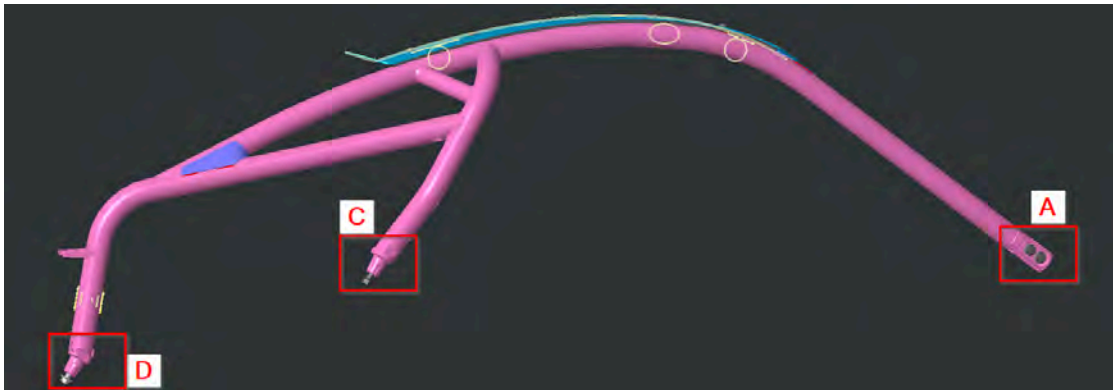

RZR PRO R 4

- Ⓐ: A-pillars
- Ⓑ: B-pillars
- Ⓒ: C-pillars
- Ⓓ: D-pillars

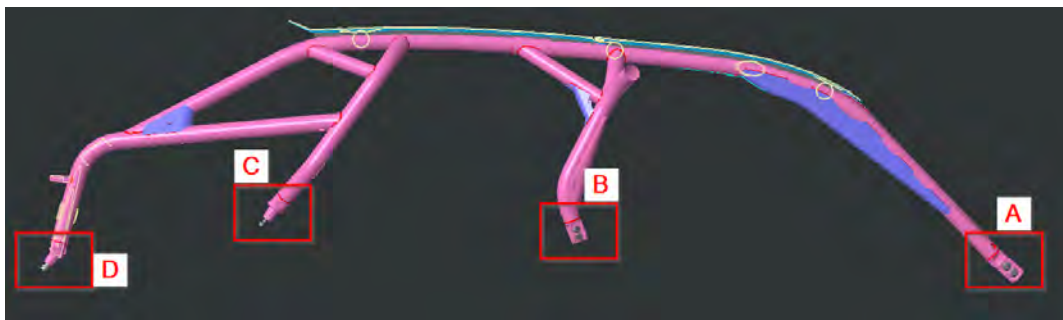

INSTRUCTIONS

1. Reference the following images. On the A-pillars you must remove the A-pillar covers to inspect for the presence of 4 total bolts and nuts, and ensure the fasteners have been tightened by checking that the flanges on the bolts and nuts are contacting the mating surface on the ROPS and chassis.

For model year 2025 vehicles, remove A-pillar cover fasteners prior to removing A-pillar cover, and install A-pillar cover fasteners prior to installing A-pillar cover.

A-PILLAR



2. For multi passenger vehicles only, on the B-pillars you must inspect for the presence of 4 total bolts and nuts, and ensure the fasteners have been tightened by checking that the flanges on the bolts and nuts are contacting the mating surface on the ROPS and chassis.

B-PILLAR



3. The C and D pillar fasteners are located under the rear fender. The C pillar fasteners will be visible through a hole in the plastic fender liner near the top of the shock. The D pillar fasteners will be visible towards the rear of the vehicle behind the tail lights. Look for the presence of 4 total bolts.

Inspect for the presence of 4 total bolts, and ensure the fasteners have been tightened by checking that the flanges on the bolts are contacting the mating surface on the ROPS and chassis.

C-PILLAR



D-PILLAR



4. If any fasteners are found to be missing or were installed but not tightened, please stop and see your dealer for the repair.
5. Continue to follow the Safety – Owner Requirements section of your owner’s manual (including personal protective equipment, including helmet, and seat belt must be fastened). Failure to follow these instructions may lead to a risk of serious injury.

IMPORTANT

Important: This inspection process is only meant to keep you riding safely prior to having the recall completed at your dealer. The safety recall will remain open on your VIN until a dealer completes the full inspection and as necessary repairs.