

TANK BAG KIT



P/N 2883517-XXX

INTERNATIONAL INSTRUCTIONS

DE DEUTSCH

Laden Sie die neuesten PDF-Anweisungen von www.indianmotorcycle.de herunter.

FR FRANÇAIS

Télécharger les dernières instructions en format PDF sur www.indianmotorcycle.fr.

IT ITALIANO

Scarica l'ultima versione delle istruzioni in formato PDF da www.indianmoto.it.

EN ENGLISH

Download the latest PDF instructions from www.indianmotorcycle.com.

ES ESPAÑOL

Descargue las instrucciones más recientes en formato PDF de www.indianmotorcycle.mx / www.indianmotorcycle.es.

ZH 中文

从www.indianmotorcycle.cn 下载最新的PDF说明。

1



2



3



4



APPLICATION

Verify accessory fitment at www.indianmotorcycle.com.

IMPORTANT


The *Tank Bag Kit* P/N 2883517-XXX is not compatible with the following accessories

- *Tracker Seat Kit* P/N 2884144-XXX
- *Tracker Seat Cowl Kit* P/N 2884145-XXX

BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference and parts ordering information.

KIT CONTENTS

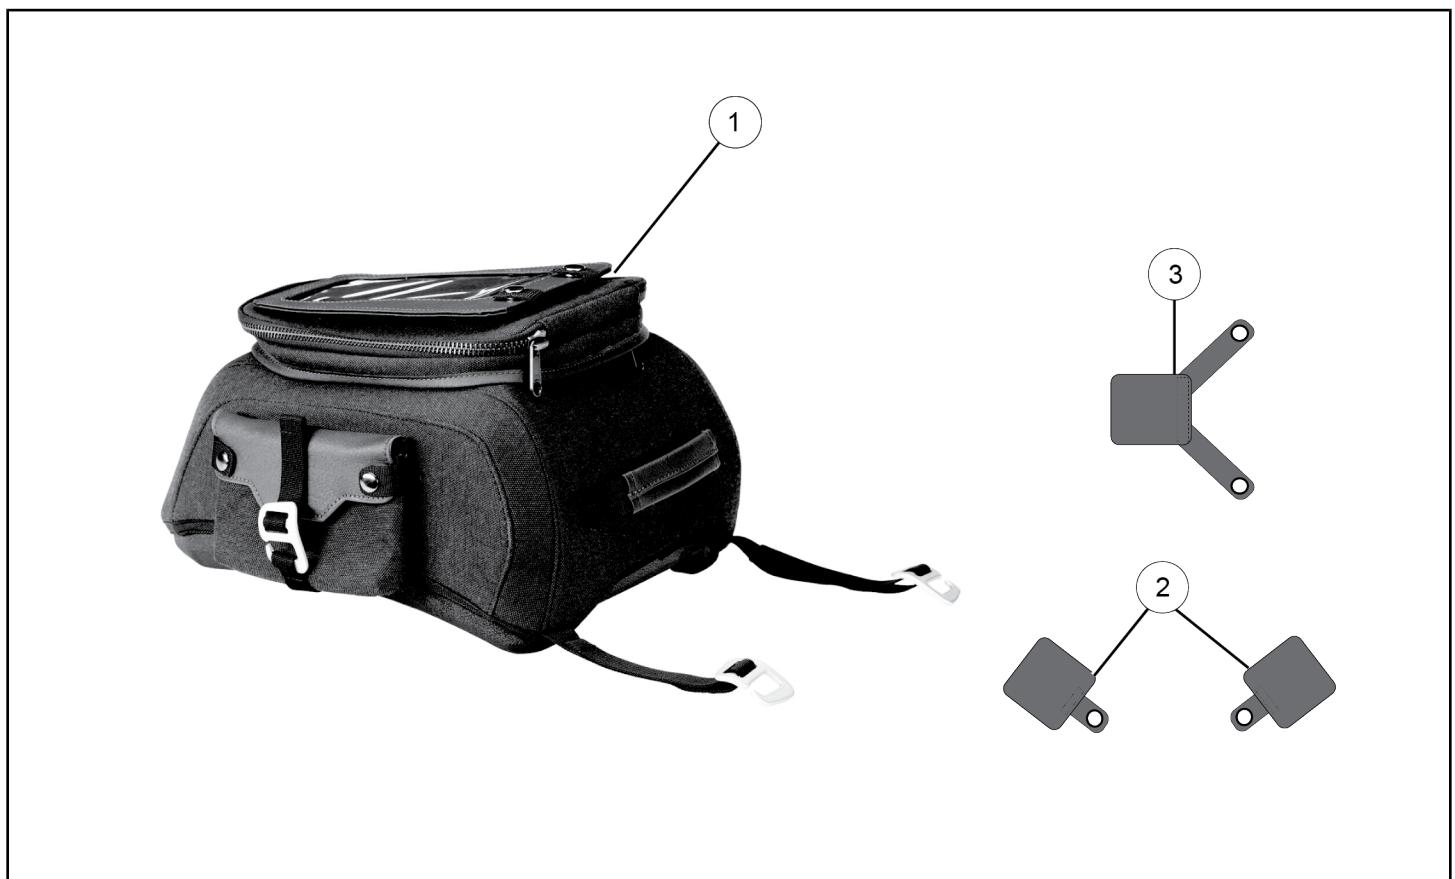

NOTE

XXX = Indian® color code (For example: 266 = Black)

REF	QTY	PART DESCRIPTION	P/N AVAILABLE SEPARATELY
1	1	Assembly–Tank Bag	N/A
2	2	Tab–Mounting, Front, Tank Bag	N/A
3	1	Tab–Mounting, Rear, Tank Bag	N/A
	1	Instructions	9929485

TOOLS REQUIRED

- Safety Glasses
- Hex Key Set, Metric
- Hex Key Set, Ball End, Metric
- Screwdriver Set, Torx®
- Socket Set, Hex Bit, Metric
- Socket Set, Torx® Bit
- Torque Wrench

CONSUMABLES REQUIRED

- Cleaning Solution (99% water + 1% mild dishwashing detergent)

IMPORTANT

Your accessory kit is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

INSTALLATION INSTRUCTIONS


VEHICLE PREPARATION

GENERAL


1. Turn key or ignition switch to OFF position and remove key.
2. Ensure motorcycle is parked on a flat surface, kickstand is fully extended, and vehicle is stable prior to installation.

SEAT REMOVAL


1. Remove and retain two handle fasteners (A) to remove passenger handle from each side of motorcycle frame.

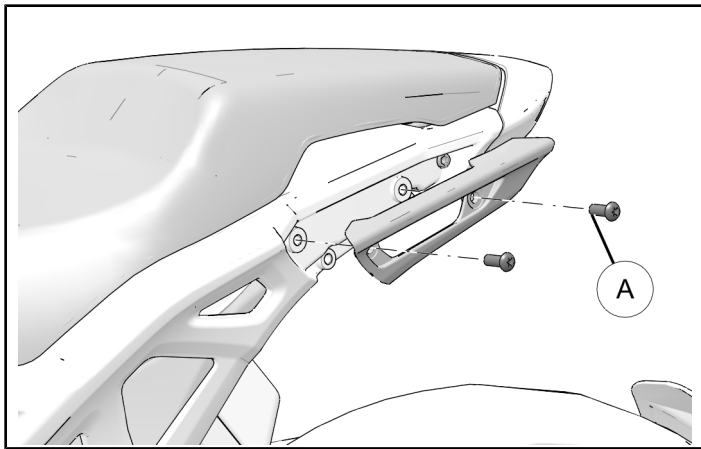

2. Remove and retain one seat fastener (B) from each side of motorcycle frame.

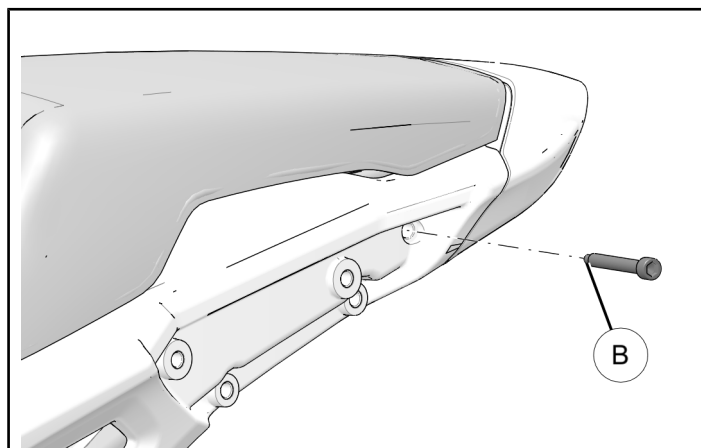


3. Slide seat back-and-up, to ensure seat slides out of mounts, to remove from motorcycle.

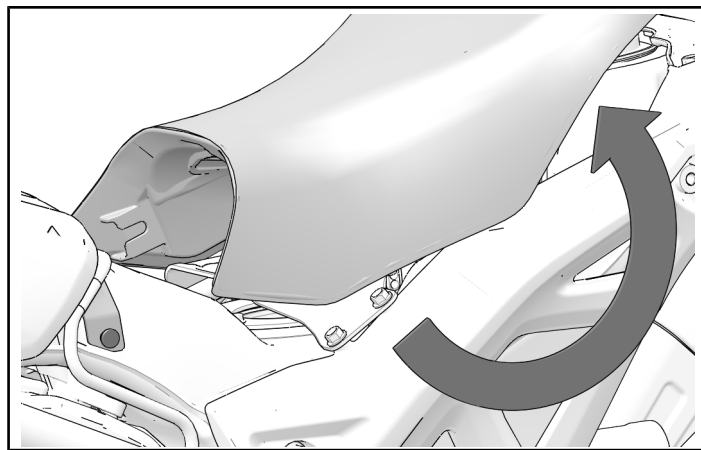

TANK COVER REMOVAL


1. Remove and retain four bezel fasteners (A) and four compression limiters (B) from tank bezel. Set tank bezel aside on soft surface.

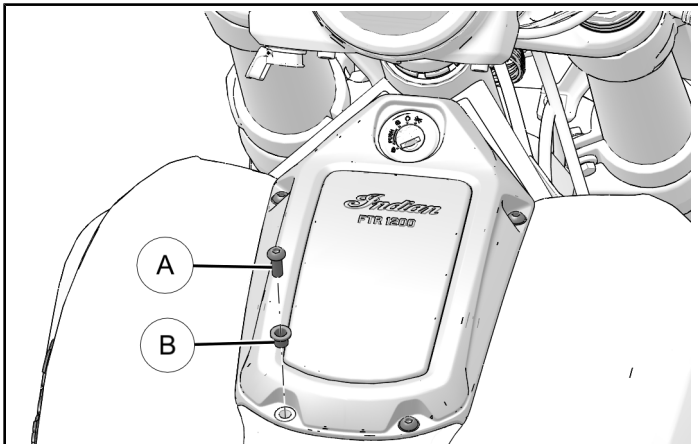


2. Tilt center console up to remove from tank cover.

NOTE


Rear-end of center console slides out of bracket at base of tank cover.

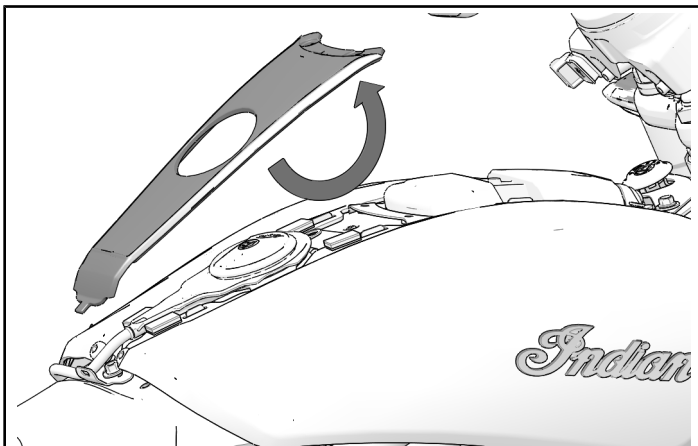


3. Remove and retain two tank cover fasteners (C) from rear-end of tank covers.

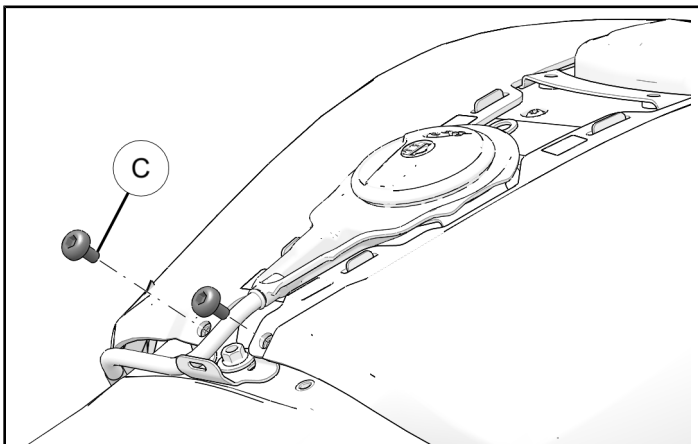

4. Pull bottom of each tank cover outward to disengage plastic rivets at two marked locations.

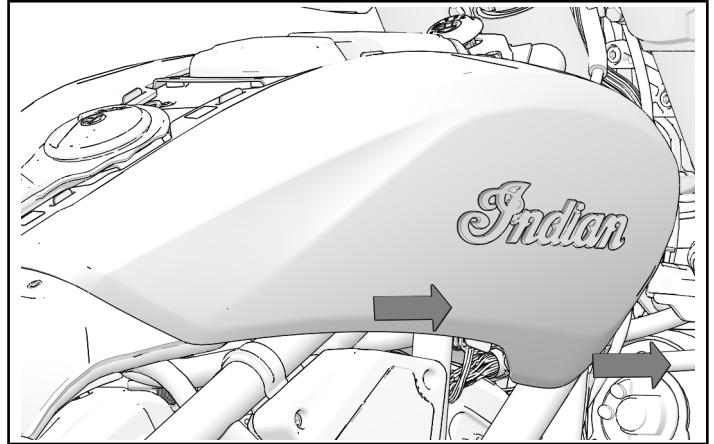


5. Pull each cover directly upward and free of alignment tabs.

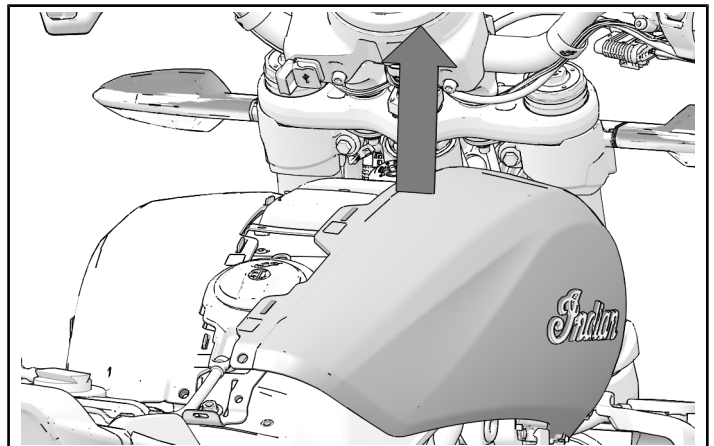

ACCESSORY INSTALLATION

MOUNTING TAB INSTALLATION


1. Remove and retain two seat mount fasteners (A).

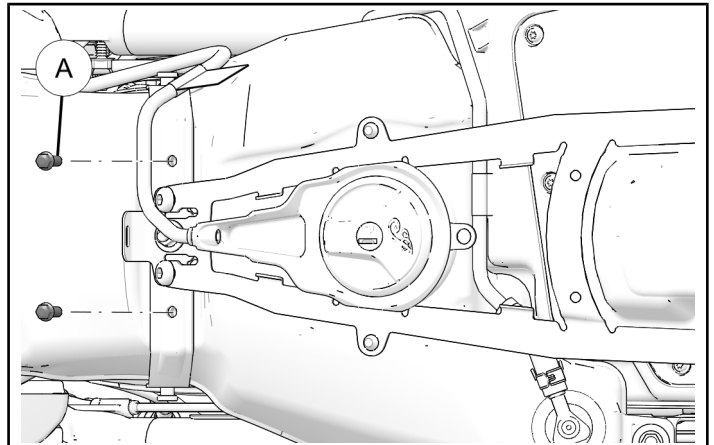


2. Place rear mounting tab ③ over mounting location, with loop facing down, and install with two retained seat mount fasteners ①.

TORQUE

Seat Mount Fasteners ①:
48 in-lbs (5 Nm)

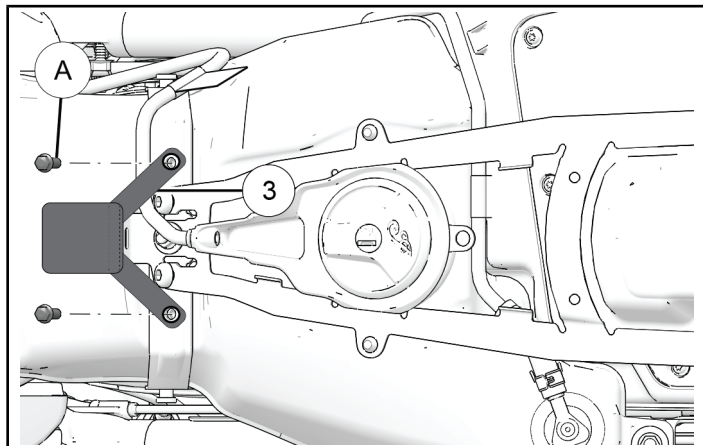


3. Remove and retain two alignment bracket fasteners ② and two washers ④.

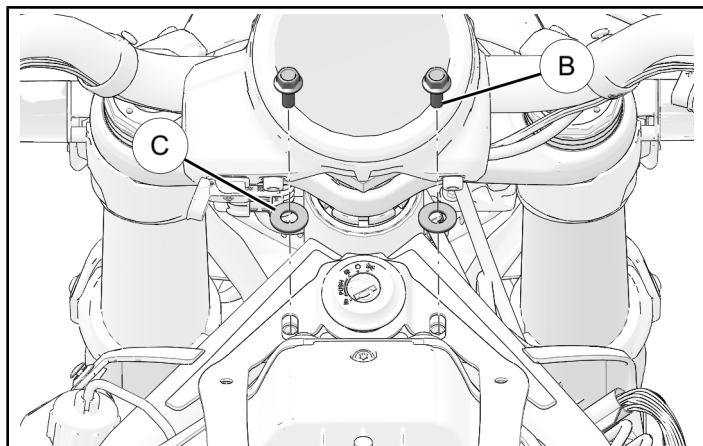

4. Place front mounting tabs ② over mounting location, with loops facing down, and install with two retained alignment bracket fasteners ② and two retained washers ④.

TORQUE


Alignment Bracket Fasteners ②:
96 in-lbs (11 Nm)

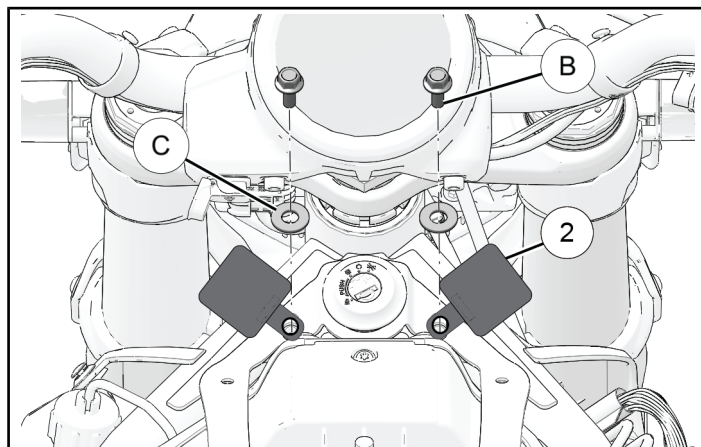


VEHICLE REASSEMBLY

SEAT INSTALLATION


1. Identify two tabs, located on underside of seat.

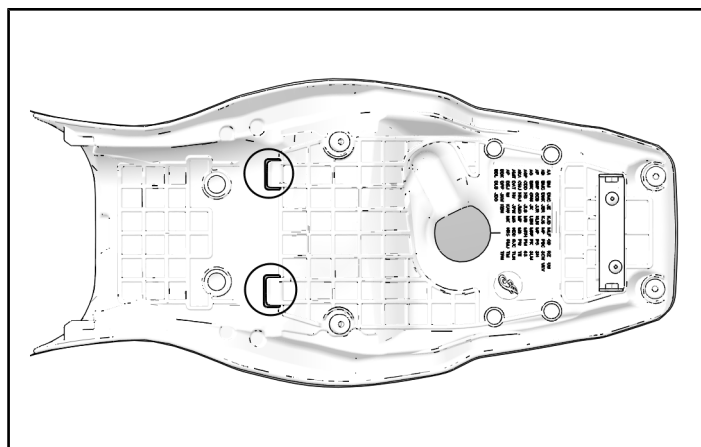

2. Tabs, identified in step 1 of this section, will slide beneath seat support bracket.

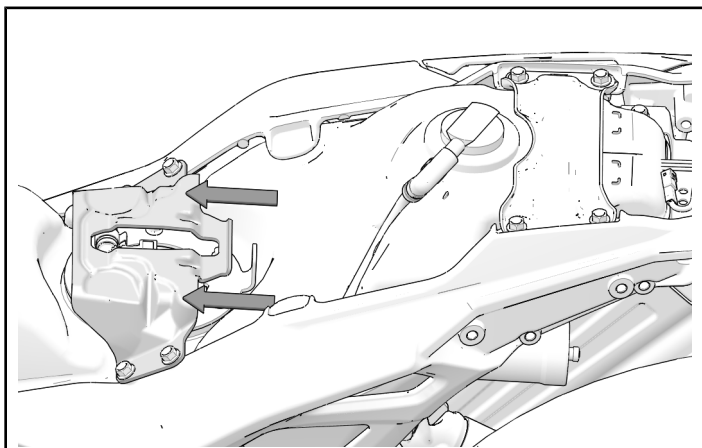


3. Slide seat into seat support bracket and into front mounting bracket.

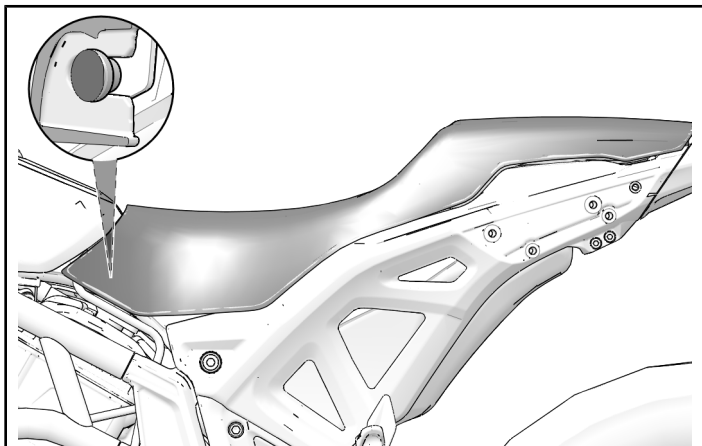

4. Secure rear of seat with two retained seat fasteners ⑧.

TORQUE


Seat Fasteners (Sub-Frame to Seat Brackets) ⑧:
84 in-lbs (9.5 Nm)

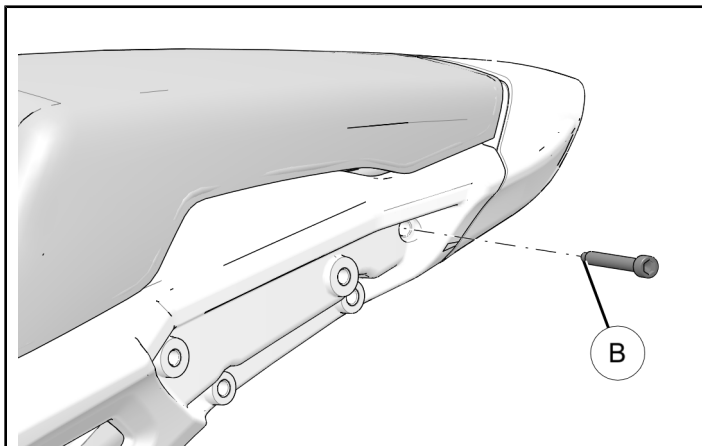

5. Install each passenger handle with two retained handle fasteners ⑨.

TORQUE

Handle Fasteners ⑨:
19 ft. lbs. (26 Nm)

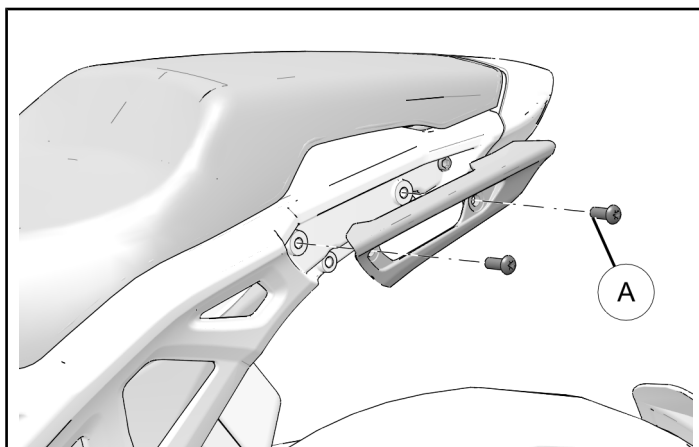


TANK COVER INSTALLATION


1. Identify two mounting locations on vehicle frame.

TIP

Spray water and soap solution on grommets to decrease friction. Friction between grommet and tank cover rivet may force grommet through metal bracket.

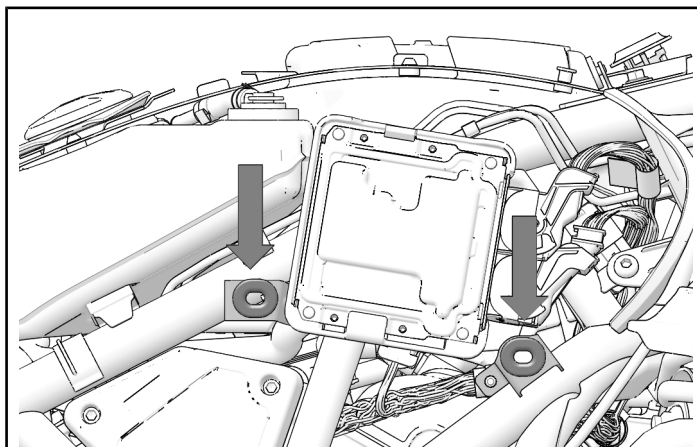


2. Place each tank cover on alignment bracket. Ensure each alignment tab is seated within corresponding tank cover hole.

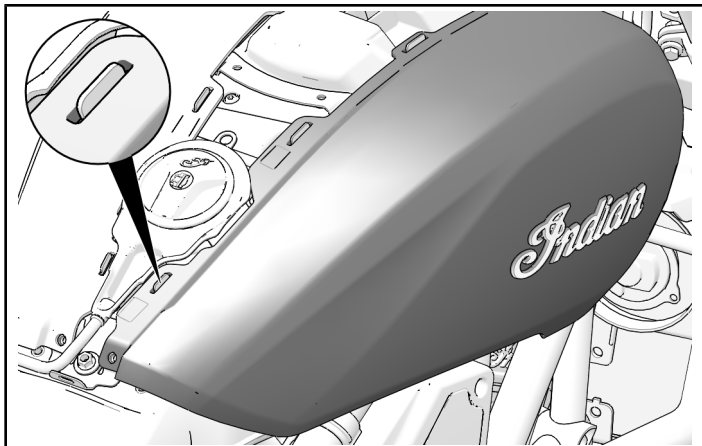


3. Firmly push lower tank cover into grommets. Ensure both tank cover rivets are firmly seated and grommet has not been pushed through bracket.
4. Secure rear-end of tank covers with two retained tank cover fasteners ③.

TORQUE

Rear Tank Cover Fasteners ③:
36 in. lbs. (4 Nm)

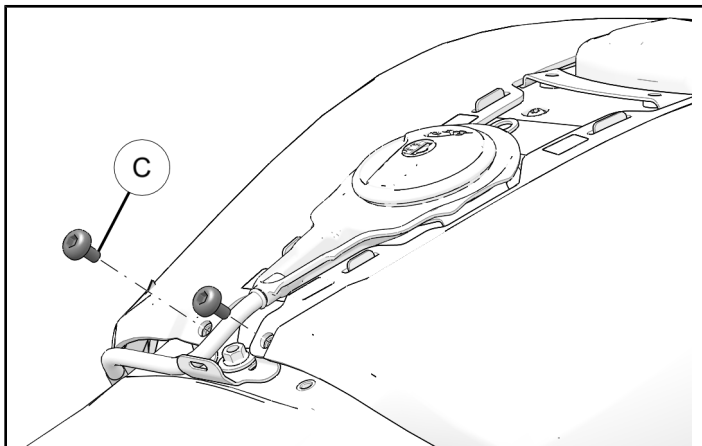


5. Place tab of center console into bottom bracket and flip down into installed position. Press firmly at adhesive pad locations to ensure each pad sticks to tank cover.

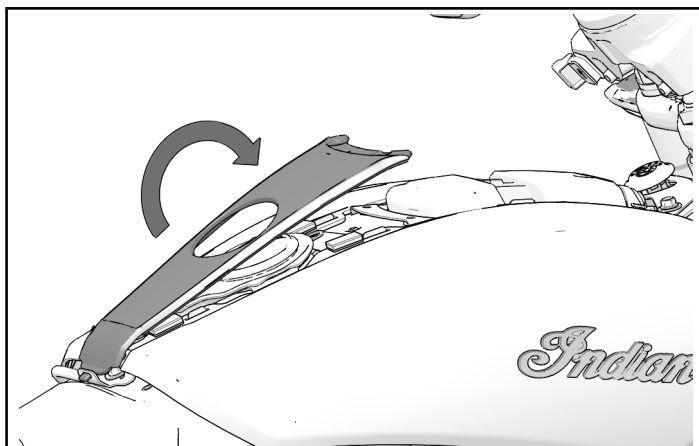

6. Reinstall tank bezel with four retained bezel fasteners ① and four retained compression limiters ②.


TORQUE

Bezel Fasteners ①:
36 in. lbs. (4 Nm)

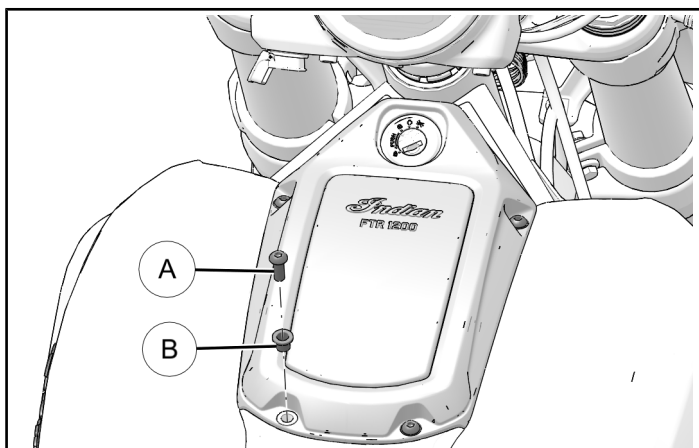

TANK BAG INSTALLATION

1. Place tank bag atop tank.
2. Lay mounting tab against tank cover and hook rear of tank bag.

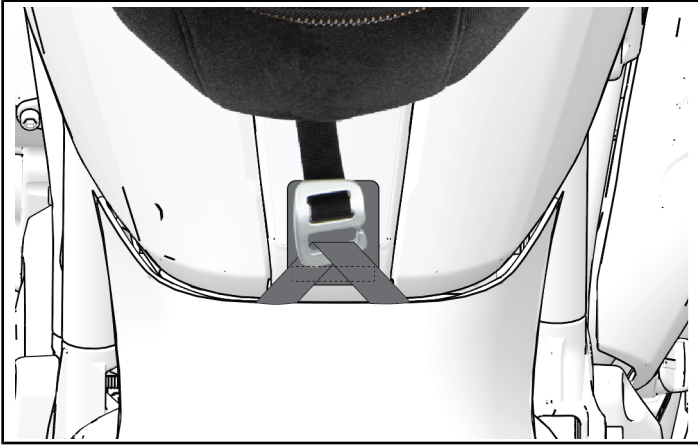

3. Lay mounting tabs against tank cover and hook front of tank bag.



4. Tighten straps to ensure hooks are fully engaged and straps are taut.
5. For best water resistance ensure roll-top is rolled at least three times and rolled fabric is facing upwards to prevent water pooling on fabric and leaking into dry compartment.

• Correct



• Incorrect



FEEDBACK FORM

A feedback form has been created for the installer to provide any comments, questions or concerns about the installation instructions. The form is viewable on mobile devices by scanning the QR code or by clicking [HERE](#) if viewing on a PC.

