

CREW ROOF KIT PN 2878755



Application Polaris Ranger

Before you begin, read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference and parts ordering information.

Kit Components:

QTY.	Part Description	Tools Needed
1	Front Roof Panel	T25 Torx Driver
1	Rear Roof Panel	
8	Snap Clamps	
16	10-24 x 5/8" Screws	
9	1/4-20 x 1" Screws	
9	Fender Washer	
9	Nylock Nut	
1	Foam Strip	
2	Edge Trim	

(Arrow points to inside of vehicle.)

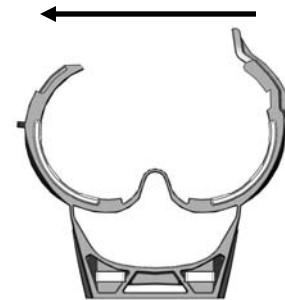


Fig. 1

IMPORTANT: Your Polaris accessory kit is exclusively designed for your Polaris vehicle. Please read the installation instructions and operator's manual thoroughly before beginning. Installation of any item is easier if the vehicle is clean and free of debris.

Approximate Installation Time: 20 Minutes

INSTALLATION INSTRUCTIONS

Note: Do not use a power drill to assemble the roof.

1. Refer to Fig. 2. Align six snap clamps with the mount holes on the inside perimeter of the crew roof. The snap clamps should be aligned so the hook portion is facing the inside of the vehicle, as shown in Fig. 1. Loosely fasten using (12) screws.
2. Align two snap clamps with the front mount holes on the rear roof panel as shown. The snap clamps should be aligned so the hook portion is facing the inside of the vehicle, as shown in Fig. 1. Loosely fasten using (4) screws.
3. Remove the adhesive backing and apply the foam strip to the rear roof panel. Trim off any excess foam once applied.
4. Apply both edge trim pieces to the bottom front edge of the rear roof panel as shown in Fig. 2.
5. Insert (9) screws through the holes in the front roof panel into the rear roof panel. Loosely fasten using (9) fender washers and (9) nylock nuts.
6. Align the assembled crew roof with the top of the RGR frame. Press the (8) snap clamps onto the frame bars. Squeeze the snap clamps once they are installed on the frame to ensure they have been snapped in place.
7. Tighten all hardware once desired fitment is reached.

IMPORTANT: Do not use glass cleaners and solvents such as ammonia, alcohol, and petroleum distillates

Maintenance: Periodically check all fasteners for tightness and re-torque as required.

Cleaning:

1. Use an indirect high pressure water supply to rinse the large dirt particles from the roof.
2. Once the majority of dirt is removed, use warm soapy water and a cotton terry cloth to wash all roof components.
3. Rinse thoroughly and allow to air dry.

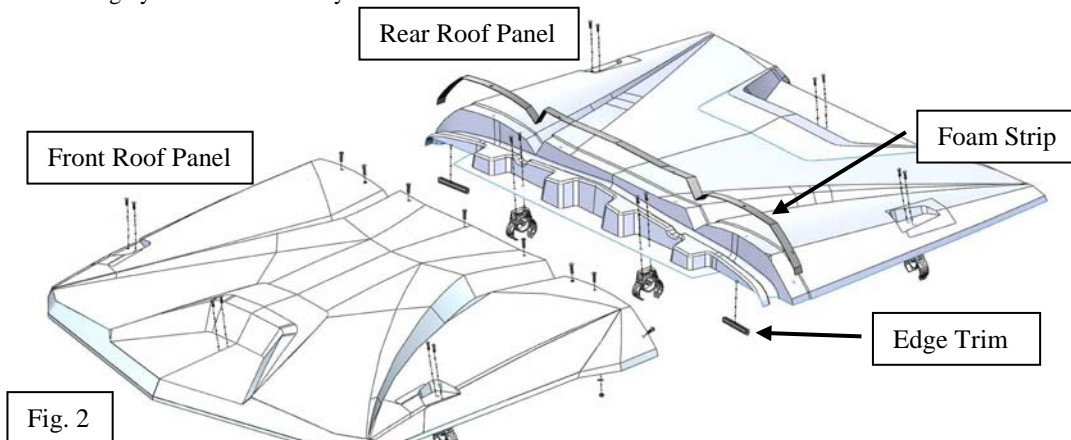


Fig. 2