### HALF WINDSHIELD

KIT PN\_2879493

ERROR: Timitcheck OFFENDING COMMAND: gsave




OPERAND STACK:

**Application**: Polaris RZR

IMPORTANT: Your Polaris accessory is exclusively designed for your vehicle. Before beginning, please read these instructions and make sure that all parts and tools are at your disposal. Keep these instructions for future reference or for any information request. To facilitate installation, make sure that your vehicle is clean and free of debris.


| Content of the kit: |             |     |      |              |     | Tools required: |     |
|---------------------|-------------|-----|------|--------------|-----|-----------------|-----|
| Ref.                | Description | Qty | Ref. | Description  | Qty | Description     | Qty |
| 01                  | Windshield  | 1   | 03   | Screw        | 8   | T25 Torx driver | 1   |
| 02                  | Snap clamp  | 4   | 04   | Sealing trim | . 1 |                 |     |

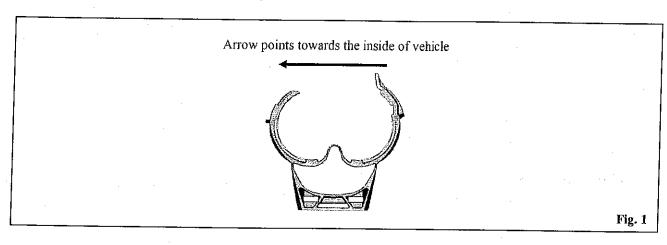

## Installation of the half windshield (approximate installation time: 20 minutes)

Note: Do not use a power drill to assemble the windshield.

1. Align all four (4) snap clamps 02 with the mount holes on the inside of the windshield. The snap clamps should be aligned so the hook portion is facing the inside of the vehicle, as shown in Fig. 1. Loosely install all four (4) snap clamps 02 onto the inside of the windshield using eight (8) screws 03. Refer to Fig. 2.

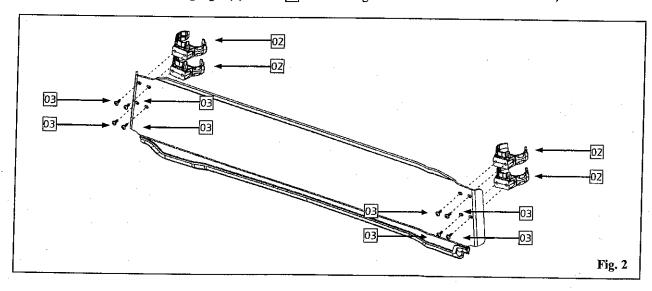

# HALF WINDSHIELD KIT PN 2879493



- 2. Align the windshield with the RZR front frame and hood. Push the snap clamps 2 onto the frame bars. Squeeze the clamps to ensure they have fully snapped in place.
- 3. Tighten all hardware once desired adjustment is reached.

### **Maintenance**

Periodically check all fasteners for tightness and re-torque as required.

### Cleaning

IMPORTANT: Do not use glass cleaners and solvents, such as ammonia, alcohol and petroleum distillates.

- 1. Use an indirect high-pressure water sprayer to rinse the large dirt particles from the windshield.
- 2. Once the majority of dirt is removed, use warm soapy water and a cotton terry cloth to wash all windshield components.
- 3. Rinse thoroughly and allow to air dry.
- 4. Use a quality polish, such as Plexus® or Novus II®, to clean and remove fine scratches from the windshield.